


# How to Set SMB Permissions

Learn how to use the myRack GUI to Configure permissions on a BrickStor dataset.

The GUI is designed to handle permissions management and simplify settings. It allows you to copy the permissions settings of another dataset as well as assign ACL groups and users.

## Guide

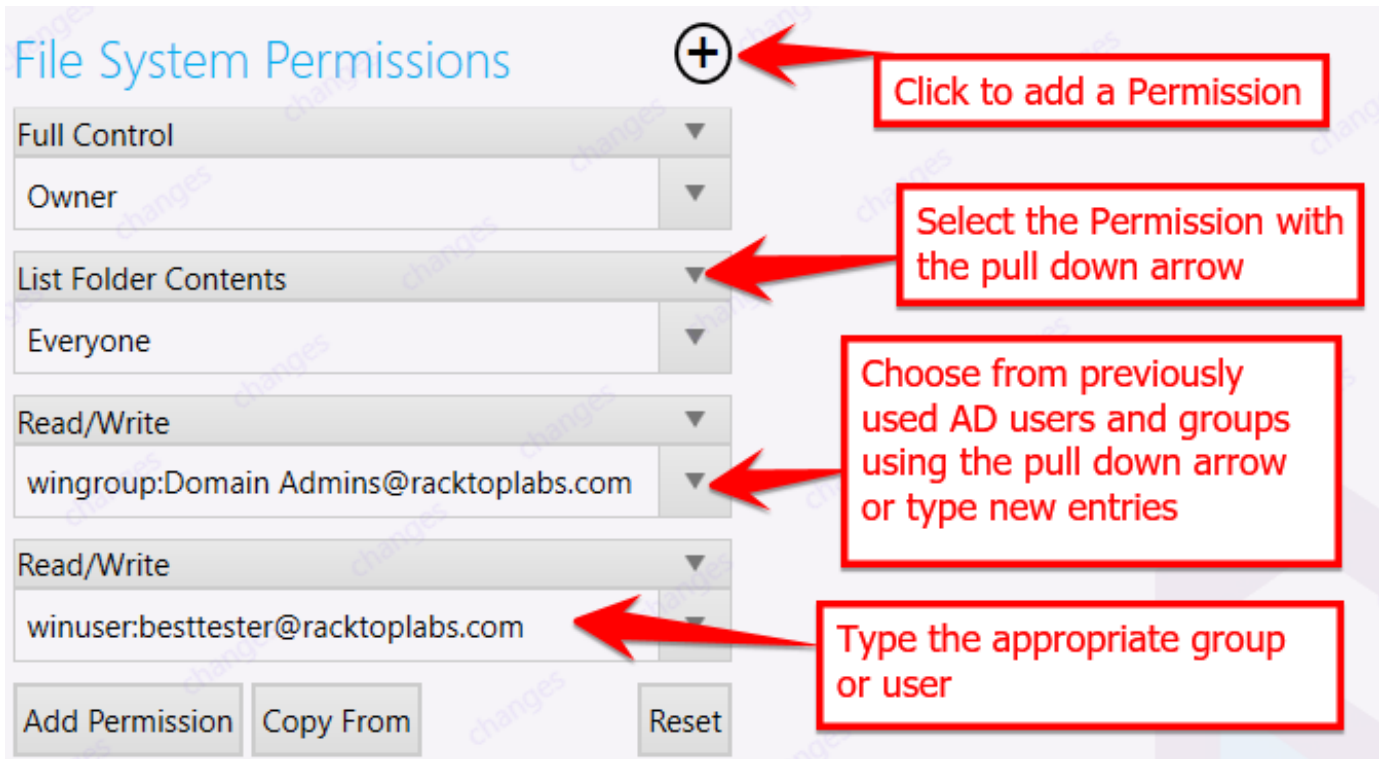

The screenshot shows the 'File System Permissions' configuration interface. It features several dropdown menus for selecting permissions, users, and groups. Red callout boxes with arrows point to specific elements: a plus sign icon for adding a permission, a dropdown arrow for selecting a permission, a dropdown arrow for choosing a user or group, and a text input field for typing a group or user name. At the bottom, there are buttons for 'Add Permission', 'Copy From', and 'Reset'.

**File System Permissions** (+) Click to add a Permission

Full Control

Owner

List Folder Contents Select the Permission with the pull down arrow

Everyone

Read/Write

wingroup:Domain Admins@racktoplabs.com Choose from previously used AD users and groups using the pull down arrow or type new entries

Read/Write

winuser:besttester@racktoplabs.com Type the appropriate group or user

Add Permission Copy From Reset

**Type the user/group name using the following format for new entries.**

**The appropriate format for adding a Windows AD user is**

winuser:<fully qualified name>

Ex: winuser:btest@racktoplabs.com

**The appropriate format for adding a Windows AD group is**

wingroup:<group name@domain>

Ex: wingroup:All Domain Users@racktoplabs.com

**The appropriate format for adding a local user is**

unixuser:<username>

Ex: unixuser:winadm

## Related articles

Page:How To Disable SMB Signing

Page:SMB2 is abnormally slow on OSX Versions > 10.11.5

Page:Brickstor is no longer connected to the domain and is unable to rejoin the domain

Page:BrickStor won't rejoin a Domain it was previously joined to